




Waste Bin Tag

Waste Bin Tag is the best solution for RFID tracking applications for waste management.

Thanks to its special shape it can easily be mounted to main used bins for recycle waste management, either those next to doors of houses or flats.

Waste Bin Tag is available with standard form factor (30mm diameter, 15 mm thick) to be installed on most types of bins and dumpsters.

It can be supplied with main different RFID chips in LF (125kHz, 134.2kHz) and HF range (13.56MHz).

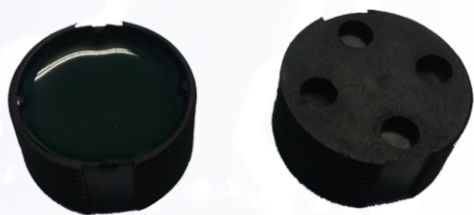

Technical:

Format	Wrought Cylinder
Materiale	Pa6 -SOK002
Color	Black
Antenna	Internal
Diameter	30mm ± 0.3mm
Thickness	15mm ± 0.3mm
Operating Temperature	-40 °C ÷ +85 °C
Weight	9.6 g

Versions:

Product Code	SK 210.2915	SY 214.2915	SK 231.2915
Chip	EM 4200	EM 4305	UHF
Frequency	125kHz	125kHz	860÷960MHz
Memory	64bit	512bit	96bit EPC, 512bit EEPROM
Mode	R/O	R/W	R/W

